



Introducing Smart call blocker*§

CLP99287/CLP99387/CLP99447/CLP99457/CLP99487/
CLP99547/CLP99557/CLP99587

DECT 6.0 cordless telephone/answering system with caller ID/call waiting

Not familiar with Smart call blocker? Want to know more?

Smart call blocker is an effective call screening tool, which allows your phone system to screen ALL home calls.†

If you are not familiar with it or want to know more before you start, read on and learn how to change to call screening mode*, and perform the necessary preparations before use.

† The screening feature of Smart call blocker is applicable to home calls only. All incoming cell calls will get through and ring.

If you want to block a cell call, add the number to the block list. Read on and learn how to add number in the block list.

* Use of Smart call blocker feature requires subscription of caller ID service.

§ Includes licenced Qaltec™ technology.

Read before use!

Issue 5.0 05/21.

So... what is Smart call blocker?

Smart call blocker filters robocalls and unwanted calls for you, while allowing welcome calls to get through.

You can set up your lists of welcome callers and unwelcome callers. The Smart call blocker allows calls from your welcome callers to get through, and it blocks calls from your unwelcome callers.

For other unknown home calls, you can allow, block, or screen these calls, or forward these calls to the answering system. With some easy configurations, you can set to only filter robocalls on the home line by asking the callers to press the pound key (#) before the calls are put through to you. You can also set the Smart call blocker to screen home calls by asking the callers to record their names and press the pound key (#). After your caller completes the request, your telephone rings and announces the caller's name. You can then choose to block or answer the call, or you can forward the call to the answering system. If the caller hangs up, or does not respond or record his/her name, the call is blocked from ringing through. When you add your welcome callers to your Directory or Allow list, they will bypass all screening and ring directly to your handsets.



Unknown calls
(for home calls only)
Calls without numbers:
- Calls without caller ID


Uncategorized calls:
Numbers or names that are NOT found in your:
- Directory
- Allow list
- Star name list
- Block list

Welcome calls
Family and friends with numbers:
- In Directory
- In Allow list
Robocalls with caller names (e.g. your pharmacy):
- In Star name list^

Unwelcome calls
Robocalls and telemarketing calls:
- Numbers in your block list



If Smart call blocker is set to:
Screening without caller name

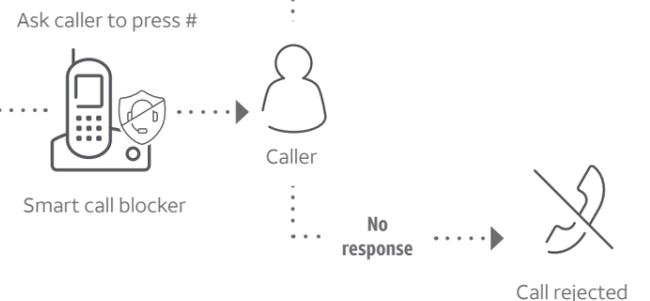

If Smart call blocker is set to:
Screening with caller name



Move to **Setup** if you want to screen all unknown home calls.

Setup

Directory

Enter and save telephone numbers of frequently called businesses, family members and friends, so that when they call, your telephone rings without having to go through the screening process.

Add contacts in your directory:

1. Press **MENU** on the handset or telephone base.
2. Press **▼CID** or **▲DIR** to choose **Directory**, and then press **SELECT**.
3. Press **OPTION** to choose **Home**.
4. Press **SELECT** again to choose **Add contact**.
5. Enter a telephone number (up to 30 digits), and then press **NEXT**.
6. Press **▼CID** or **▲DIR** to choose **Home**, **Cell**, **Work** or **Other**, and then press **NEXT**.
7. Enter a name (up to 15 characters), and then press **SAVE**.

To add another contact, repeat from step 4.

Block list

Add numbers that you want to prevent their calls from ringing through.

- ▶ Cell calls with numbers that have been added to your block list will also be blocked.

Add a block entry:

1. Press **MENU** on the handset or telephone base.
2. Press **▼CID** or **▲DIR** to choose **Smart call blk**, and then press **SELECT**.
3. Press **▼CID** or **▲DIR** to choose **Block list**, and then press **SELECT**.
4. Press **▼CID** or **▲DIR** to choose **Add new entry**, and then press **SELECT**.
5. Enter a telephone number (up to 30 digits), and then press **NEXT**.
6. Enter a name (up to 15 characters), and then press **SAVE**.

To add another entry in block list, repeat from step 4.

Allow list

Add numbers that you want to always allow their calls to get through to you without having to go through the screening process.

Add an allow entry:

1. Press **MENU** on the handset or telephone base.
2. Press **▼CID** or **▲DIR** to choose **Smart call blk**, and then press **SELECT**.
3. Press **▼CID** or **▲DIR** to choose **Allow list**, and then press **SELECT**.
4. Press **▼CID** or **▲DIR** to choose **Add new entry**, and then press **SELECT**.
5. Enter a telephone number (up to 30 digits), and then press **NEXT**.
6. Enter a name (up to 15 characters), and then press **SAVE**.

To add another entry in allow list, repeat from step 4.

Star name list^

Add caller NAMES to your star name list to allow their calls to get through to you without having to go through the screening process.

Add a star name entry:

1. Press **MENU** on the handset or telephone base.
2. Press **▼CID** or **▲DIR** to choose **Smart call blk**, and then press **SELECT**.
3. Press **▼CID** or **▲DIR** to choose **Star name list**, and then press **SELECT**.
4. Press **▼CID** or **▲DIR** to choose **Add new entry**, and then press **SELECT**.
5. Enter a name (up to 15 characters), and then press **SAVE**.

To add another entry in star name list, repeat from step 4.

^ There are many organizations like schools, medical offices, and pharmacies that use robocalls to communicate important information to you. Robocall uses an autodialer to deliver pre-recorded messages. By entering the name of the organizations into the Star name list, it ensures these calls will ring through when you only know the caller names but not their numbers.

You are now ready to start using your telephone system with Smart call blocker.

To turn on call screening:

1. Press **MENU** on the handset or telephone base.
2. Press **▼CID** or **▲DIR** to choose **Smart call blk**, and then press **SELECT**.
3. Press **▼CID** or **▲DIR** to choose **Calls w/o num**, and then press **SELECT**.
4. Press **▼CID** or **▲DIR** to **Screening**, and then press **SELECT**.
5. Press **SELECT** again to select **w/ Caller name**.
6. Press **▼CID** or **▲DIR** to choose **Uncategorized**, and then press **SELECT**.
7. Press **▼CID** or **▲DIR** to choose **Screening**, and then press **SELECT**.
8. Press **SELECT** again to select **w/ Caller name**.

▶ Make sure you have not turned off Smart call blocker. Otherwise, calls will not be screened.



What if I want to...

Choose the Smart call block configuration that best suits your needs.

Scenarios	I want to screen any home call from numbers not saved in the Directory, Allow list, or Star name list.	I want to only screen home calls that do not display a phone number.	I want to allow all calls except the people on the Block list only.	I want to screen robocalls on the home line only.	I want to block home calls that do not display a phone number, and send any home calls from numbers not saved in the Directory, Allow list, or Star name list to the answering system.	I want to allow all calls to ring and do not want to block any numbers.
Settings	(1)	(2)	Default settings (3)	(4)	(5)	(6)
Voice guide setup	Press 1 when prompted	Press 2 when prompted	Press 3 when prompted	-	-	-
Smart call blocker On/Off	On	On	On	On	On	Off
Calls w/o numbers	Screening with caller name	Screening with caller name	Allow	Allow	Block	-
Uncategorized calls	Screening with caller name	Allow	Allow	Screening without caller name	Answering system	-

Use voice guide to set Smart call blocker

Right after installing your phone, the voice guide will provide you a quick and easy way to configure Smart call blocker.

After you install your telephone, the handset and the telephone base will prompt you to set the date and time. When this is done or skipped, the handset and the telephone base then prompts if you want to set Smart call blocker - "Hello! This voice guide will assist you with the basic setup of Smart call blocker...". Scenarios (1), (2) and (3) are very easy to set up with the voice guide. Just press 1, 2 or 3 on the handset or on the telephone base when prompted.



- ▶ Press 1 if you want to screen home calls with telephone numbers that are not saved in your Directory, Allow list, or Star name list;
- ▶ Press 2 if you want to screen home calls that do not display a telephone number; or
- ▶ Press 3 if you do not want to screen calls, and want to allow all incoming calls to get through.

Note: To restart the voice guide:

1. Press **MENU** on the telephone base.
2. Press **▼CALLER ID** or **▲DIRECTORY** to choose **Smart call blk**.
3. Press **▼CALLER ID** or **▲DIRECTORY** to choose **Voice guide**, and then press **SELECT**.

Go to the Calls without numbers setting menu

Before performing the steps to set up Smart call blocker, as described in the six scenarios on the right, make sure you do the following steps to enter into the **Calls without numbers** setting menu first.

1. Press **MENU** on the handset or telephone base.
2. Press **▼CID** or **▲DIR** to choose **Smart call blk**, and then press **SELECT**.
3. Press **▼CID** or **▲DIR** to choose **Calls w/o num**, and then press **SELECT**.




Go to the Uncategorized setting menu

Before performing the steps to set up Smart call blocker, as described in the six scenarios on the right, make sure you do the following steps to enter into the **Uncategorized** setting menu first.

1. Press **MENU** on the handset or telephone base.
2. Press **▼CID** or **▲DIR** to choose **Smart call blk**, and then press **SELECT**.
3. Press **▼CID** or **▲DIR** to choose **Uncategorized**, and then press **SELECT**.




Screen all home calls except welcome calls (1)

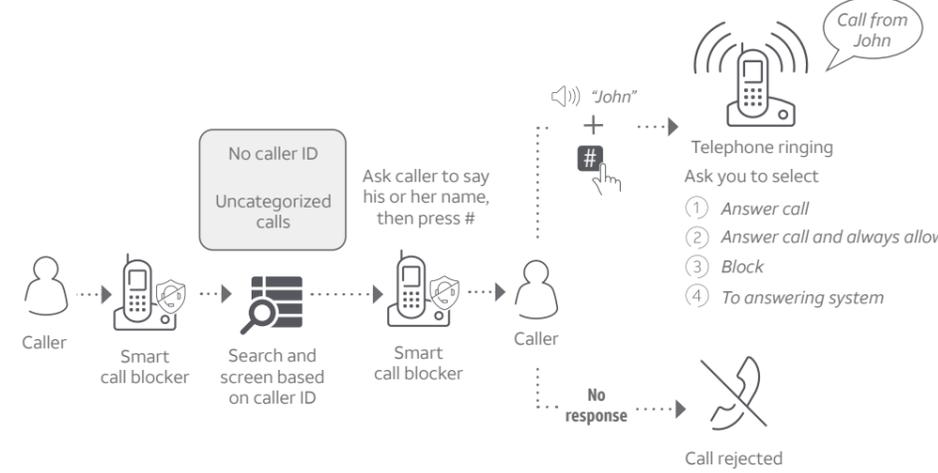


1. On the **Calls without numbers** setting menu, press **▼CID** or **▲DIR** to choose **Screening**, and then press **SELECT**.
2. Press **SELECT** again to select **w/ Caller name**.
3. On the **Uncategorized** setting menu, press **▼CID** or **▲DIR** to choose **Screening**, and then press **SELECT**.
4. Press **SELECT** again to select **w/ Caller name**.

Screen no caller ID home calls (2)

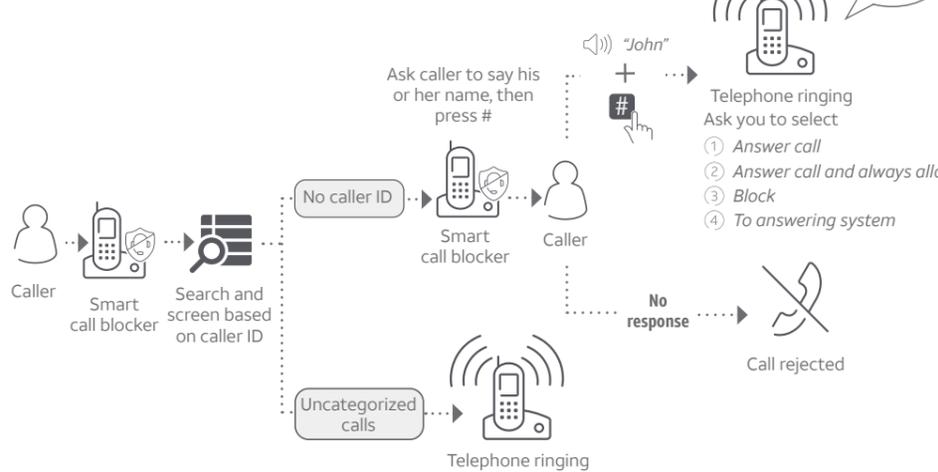


1. On the **Calls without numbers** setting menu, press **▼CID** or **▲DIR** to choose **Screening**, and then press **SELECT**.
2. Press **SELECT** again to select **w/ Caller name**.
3. On the **Uncategorized** setting menu, press **▼CID** or **▲DIR** to choose **Allow**, and then press **SELECT**.

Block calls on the block list only (3) - Default settings

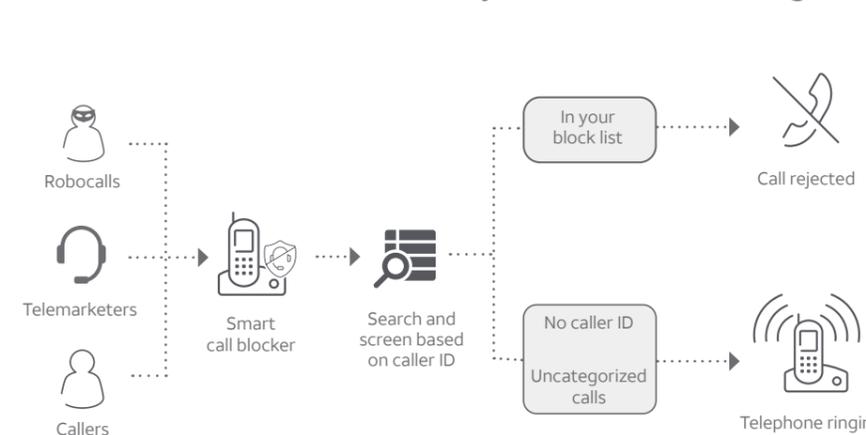


1. On the **Calls without numbers** setting menu, press **▼CID** or **▲DIR** to choose **Allow**, and then press **SELECT**.
2. On the **Uncategorized** setting menu, press **▼CID** or **▲DIR** to choose **Allow**, and then press **SELECT**.

Screen and block robocalls on the home line (4)

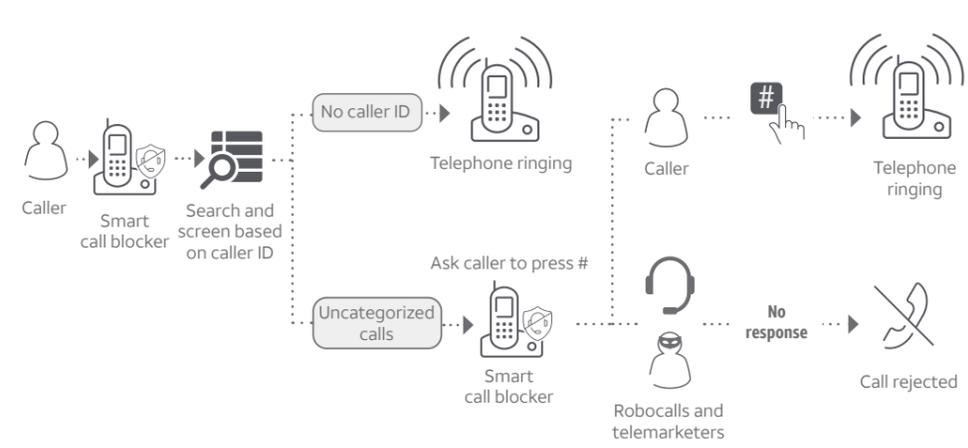

1. On the **Calls without numbers** setting menu, press **▼CID** or **▲DIR** to choose **Allow**, and then press **SELECT**.
2. On the **Uncategorized** setting menu, press **▼CID** or **▲DIR** to choose **Screening**, and then press **SELECT**.
3. Press **▼CID** or **▲DIR** to choose **w/o Caller name**, and then press **SELECT**.

Block no caller ID home calls | Forward uncategorized home calls to answering system (5)

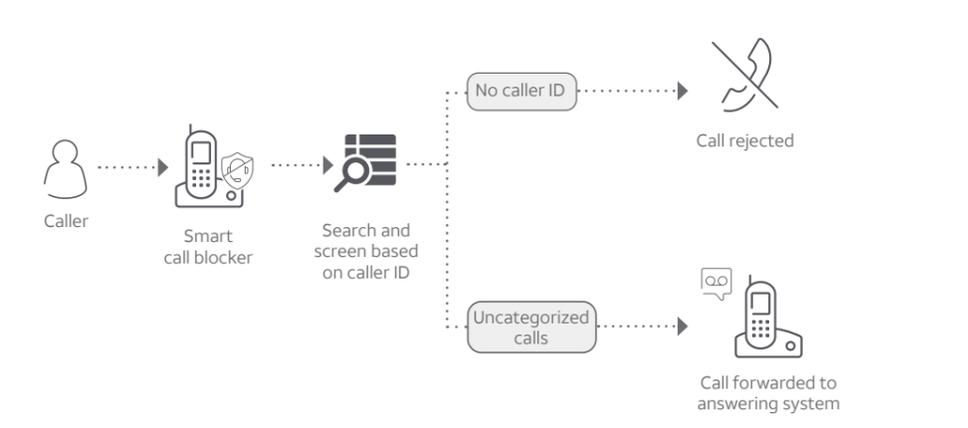

1. On the **Calls without numbers** setting menu, press **▼CID** or **▲DIR** to choose **Block**, and then press **SELECT**.
2. On the **Uncategorized** setting menu, press **▼CID** or **▲DIR** to choose **Answering sys**, and then press **SELECT**.

Allow all calls (6)



1. Press **MENU** on the handset or telephone base.
2. Press **▼CID** or **▲DIR** to choose **Smart call blk**, and then press **SELECT**.
3. Press **SELECT** to select **SCB On/Off**.
4. Press **▼CID** or **▲DIR** to choose **Off**, and then press **SELECT**.

For complete operation instructions of Smart call blocker, read the Complete user's manual of your telephone system.

How to unblock a telephone number?

1. Press **MENU** on the handset or telephone base.
2. Press **▼CID** or **▲DIR** to choose **Smart call blk**, and then press **SELECT**.
3. Press **▼CID** or **▲DIR** to choose **Block list**, and then press **SELECT**.
4. Press **SELECT** again to choose **Review**.
5. Press **▼CID** or **▲DIR** to browse through the block entries.
6. When the desired entry displays, press **DELETE**. The screen shows **Delete entry?**.
7. Press **YES** to confirm.